




DK193 Rhino-Rack VA, Aero, Euro & HD crossbar instruction



Vehicle	Date	Crossbar	FRONT CROSSBAR					REAR CROSSBAR					
			Front Right Pad/ Clamp	Front Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/ Clamp	Rear Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)
Mazda 3 5dr hatch	2009 on	1260mm	M415 SUB0148	M414 SUB0148	163mm	50mm	974mm / 38,11/32"	OUT	M416 SUB0152	152mm	39mm	952mm / 37,31/64"	OUT
			Arrow OUT						Arrow OUT				

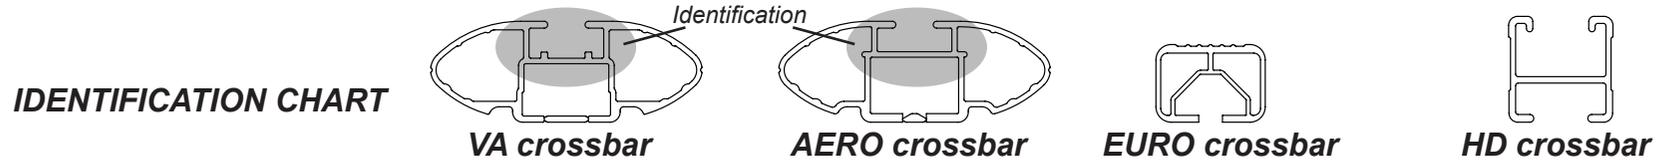

DK193 Rhino-Rack VA, Aero, Euro & HD crossbar instruction

Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.





Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

Placement of pads:

- Pad M414 FRONT Left of vehicle Arrow facing outward.
- Pad M415 FRONT Right of vehicle Arrow facing outward.
- Pad M416 REAR Left & Right of vehicle Arrow facing outward.

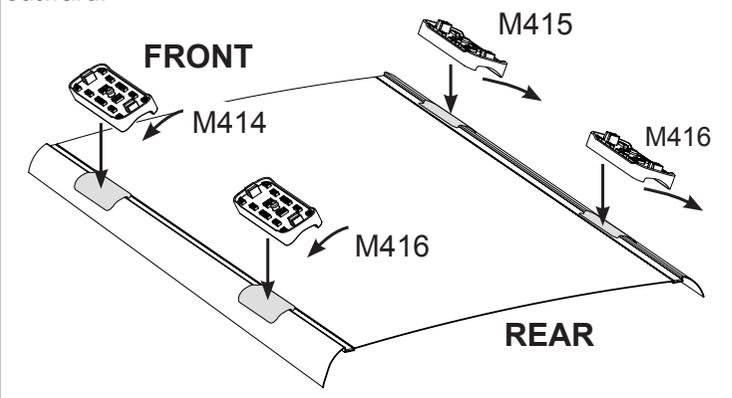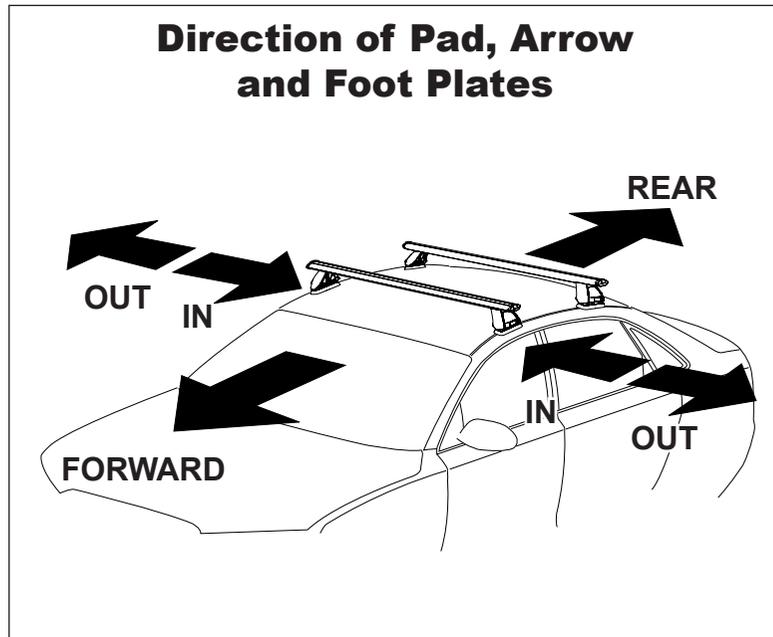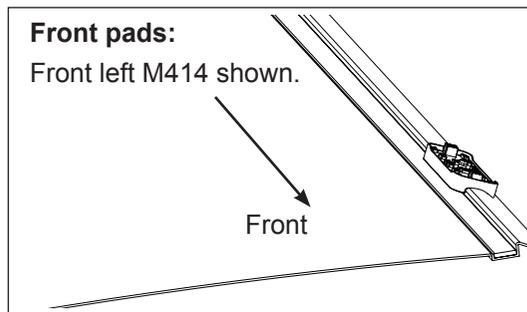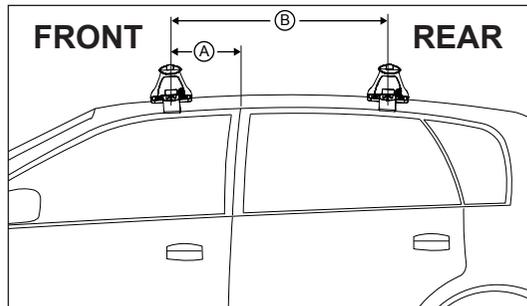

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)
Mazda 3 5dr hatch	2009 on	250mm / 9,27/32"	700mm / 27,9/16"	75kg / 165lbs