







**IDENTIFICATION CHART**



**FRONT CROSSBAR**

**REAR CROSSBAR**

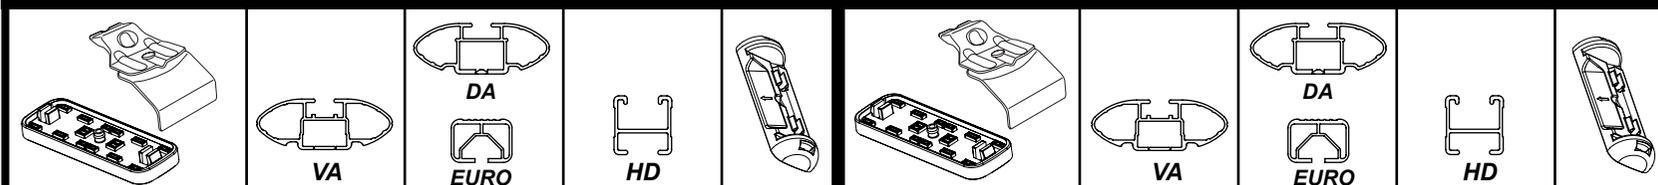

Vehicle	Date	Crossbar	Front Right Pad/Clamp		Measurement strip length per side	Measurement strip length per side	Measurement Distance ( x )	Foot plate arrow direction	Rear Right Pad/Clamp		Measurement strip length per side	Measurement strip length per side	Measurement Distance ( x )	Foot plate arrow direction
			Front Right Pad/Clamp	Front Left Pad/Clamp					Rear Right Pad/Clamp	Rear Left Pad/Clamp				
Audi A3/S3 4dr sedan	13-	1260mm	M366 SUB0613	M366 SUB0613	187mm	74mm	1022mm / 40,1/4"	OUT	M366 SUB0614	M366 SUB0614	165mm	52mm	978mm / 38,1/2"	OUT
			Pad Arrow Forward						Pad Arrow Forward					



# Rhino Rack 2500 Series - DK425 instruction



**CONTROLLED**

**Measurement A:** CENTRE of door jamb to CENTRE arrow of leg foot plate.

**Measurement B:** CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

**Carrying capacity:** Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

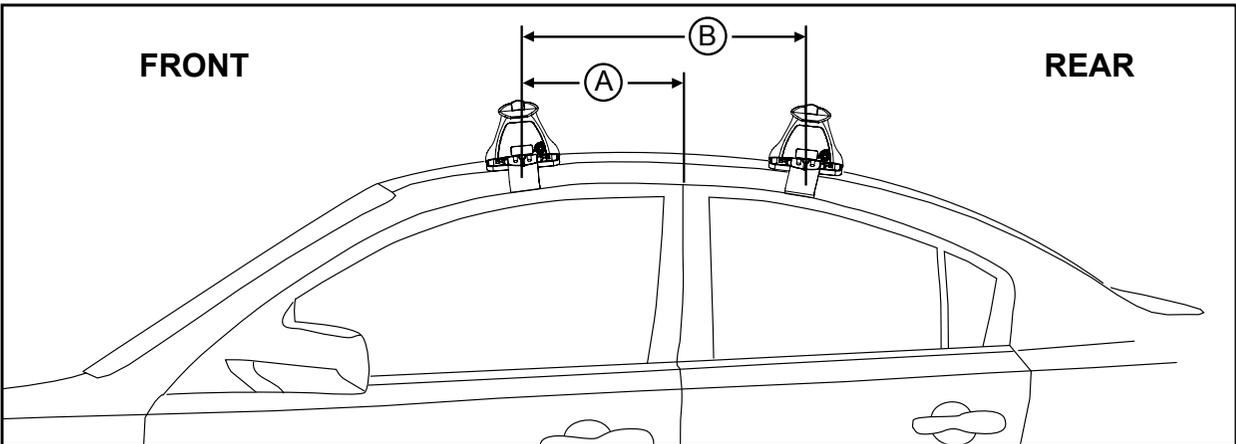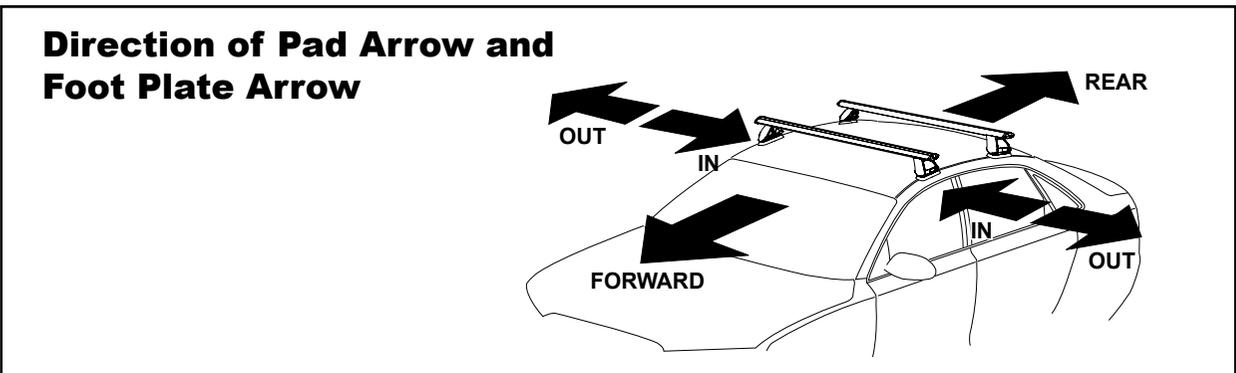

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)
Audi A3/S3 4dr sedan	13-	280mm / 11,1/32"	700mm / 27,9/16"	75kg / 165lbs