



RHINO-RACK

RVP54 Supplement - Mitsubishi Sportsback Lancer


Important: Please read these instructions carefully prior to installation.
 Please refer to your fitting instruction to ensure that the Roof Rack System is installed in the correct location.
 Check the contents of kit before commencing fitment and report any discrepancies.
 Place these instructions in the vehicle's glove box after installation is complete.

Maximum load carrying capacity: 80kg/ 176lbs - 2 crossbars


Leg kit: RVL4
Front bar: 1000mm
Rear bar: 966mm
Base kit: RCP46-BK





Leg kit: RCL4
VA Bar: VA118/B
Base kit: RCP46-BK



Leg kit: RCL4
HD Bar: RB1120S/B
Spacers: QMHD05
Base kit: RCP46-BK




1 Locate the mounting points on the roof of the vehicle. Slide the covers out as shown and expose the mounting points below. Install pads and crossbars as per corresponding instructions.

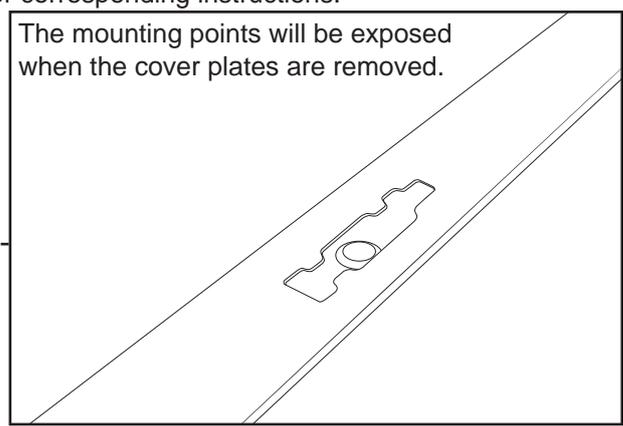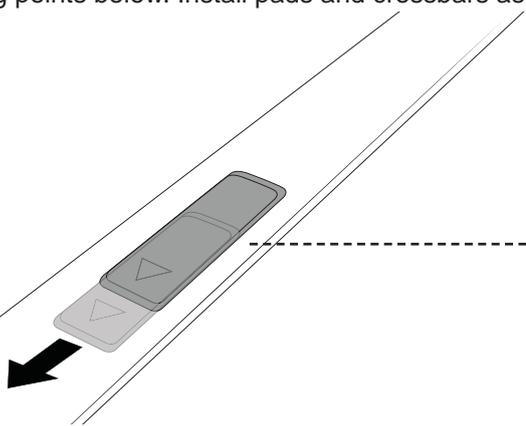


The mounting points will be exposed when the cover plates are removed.

Note Vortex crossbars can be cut to length to fit this vehicle. Measure the desired length out **from the centre of the Vortex Bar** and create a reference with a marker. Carefully cut the bar at these markings using a Saw with an Alloy Cutting Blade.

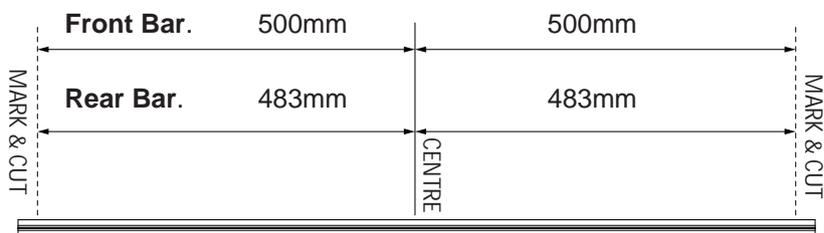

Cut the Bar at the required length.

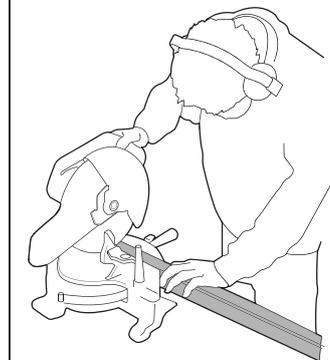

Note for dealers when altering a RSP kits:
 Add 38mm to sports bar measurement for RVL.
 Add 40mm to sports bar measurement for RVH.