





# DK144 Rhino-Rack VA, Aero, Euro & HD crossbar instruction


## IDENTIFICATION CHART

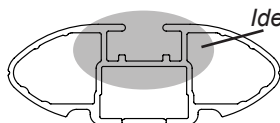


VA crossbar

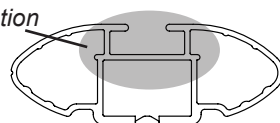

AERO crossbar







EURO crossbar







HD crossbar

### FRONT CROSSBAR



### REAR CROSSBAR



Vehicle	Date	Crossbar	Front Right Pad/Clamp	Front Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance ( x )	Foot plate arrow direction	Rear Right Pad/Clamp	Rear Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance ( x )	Foot plate arrow direction
Great Wall V200 Dual Cab utility	08/11-	1260mm	M367 SUB0246	M367 SUB0246	151mm	38mm	950mm / 37,13/32"	OUT	M367 SUB0246	M367 SUB0246	142mm	29mm	932mm / 36,11/16"	OUT
			Arrow FORWARD						Arrow FORWARD					
Great Wall V240 Dual Cab utility	07/09-	1260mm	M367 SUB0246	M367 SUB0246	151mm	38mm	950mm / 37,13/32"	OUT	M367 SUB0246	M367 SUB0246	142mm	29mm	932mm / 36,11/16"	OUT
			Arrow FORWARD						Arrow FORWARD					
Great Wall Steed Dual Cab utility	2009-	1260mm	M367 SUB0246	M367 SUB0246	151mm	38mm	950mm / 37,13/32"	OUT	M367 SUB0246	M367 SUB0246	142mm	29mm	932mm / 36,11/16"	OUT
			Arrow FORWARD						Arrow FORWARD					



## DK144 Rhino-Rack VA, Aero, Euro & HD crossbar instruction


**Measurement A:** CENTRE of door jamb to CENTRE arrow of leg foot plate.

**Measurement B:** CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.



**Carrying capacity:** Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.


- 1** Open doors. Pull front and rear rubber door seal down to fit metal strap.

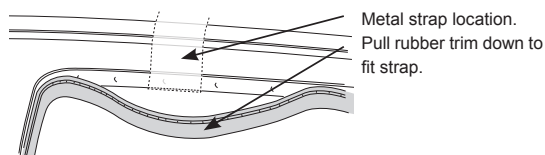

- 2** Re-fit the rubber strip over metal strap.

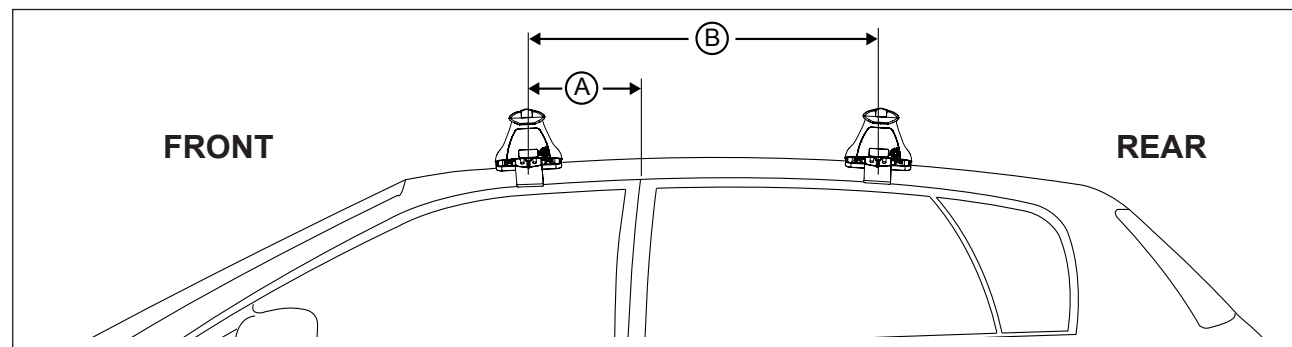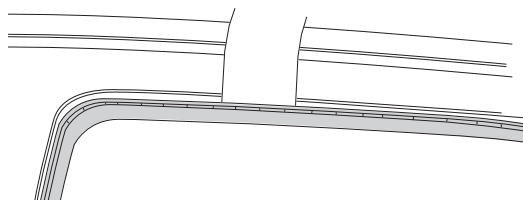

### Direction of Pad, Arrow and Foot Plates

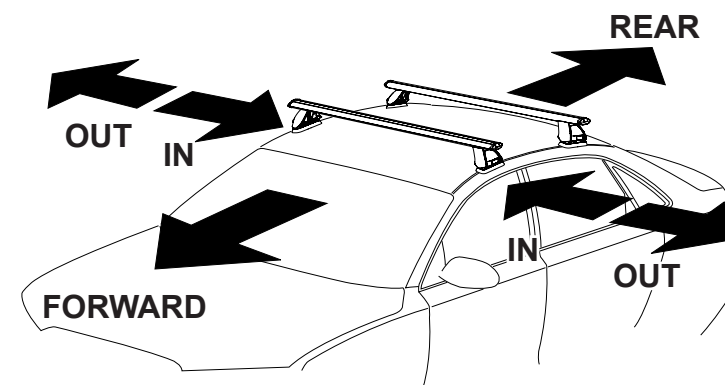

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)
Great Wall V200 Dual Cab utility	08/11-	220mm / 8,21/32"	700mm / 27,9/16"	75kg / 165lbs
Great Wall V240 Dual Cab utility	07/09-	220mm / 8,21/32"	700mm / 27,9/16"	75kg / 165lbs
Great Wall Steed Dual Cab utility	2009-	220mm / 8,21/32"	700mm / 27,9/16"	75kg / 165lbs