



RHINO-RACK

RVP12 Supplement - Grand Vitara 4Dr 09/05


Important: Please read these instructions carefully prior to installation.
 Please refer to your fitting instruction to ensure that the Roof Rack System is installed in the correct location.
 Check the contents of kit before commencing fitment and report any discrepancies.
 Place these instructions in the vehicle's glove box after installation is complete.

Maximum load carrying capacity: 50kg/ 110lbs - 2 crossbars.


Leg kit: RVL4
Front bar: 936mm
Rear bar: 871mm
Base kit: RCP12-BK




Leg kit: RCL4
VA Bar: VA126S/B
Base kit: RCP12-BK




Leg kit: RCL4
HD Bar: RB1250S/B
Spacers: QMHD05
Base kit: RCP12-BK




1 Place the base pads on the roof rail at 290mm from the front join on the roof rail then 605mm between the pads. Install crossbars as per corresponding instructions.

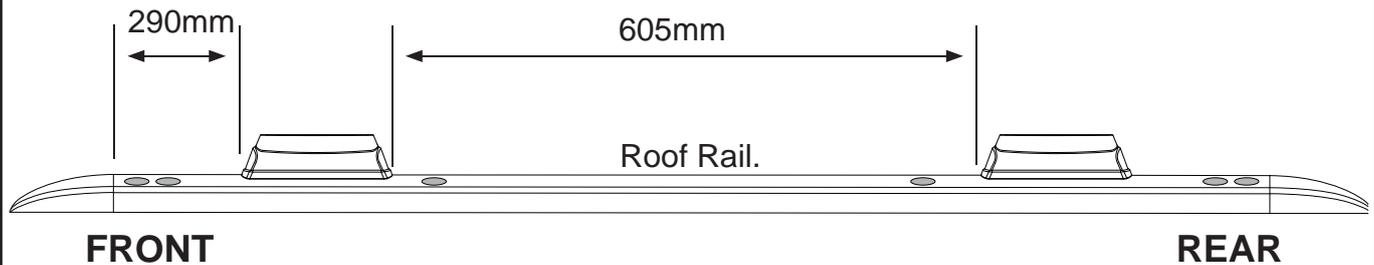

Note Vortex crossbars can be cut to length to fit this vehicle. Measure the desired length out **from the centre of the Vortex Bar** and create a reference with a marker. Carefully cut the bar at these markings using a Saw with an Alloy Cutting Blade.

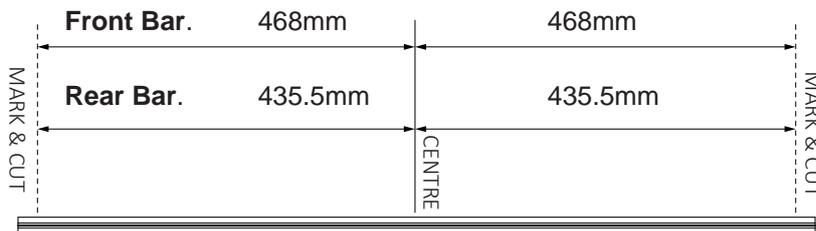

Cut the Bar at the required length.

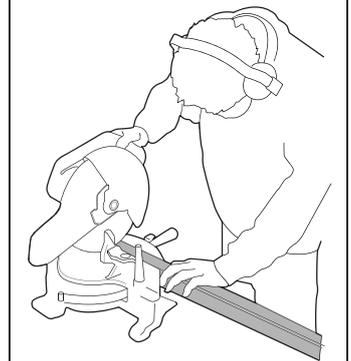

Note for dealers when altering a RSP kits:
 Add 38mm to sports bar measurement for RVL.
 Add 40mm to sports bar measurement for RVH.

Prepared By: Kayle Everett Authorised: Chris Murty Document: R1385 Date: 01/06/17 Issue: 01